External automations
for swing-leaf gates

415-24Vdc

24V Electromechanical operator


Max width single leaf

2 - 3 m

Use frequency

Continuous use



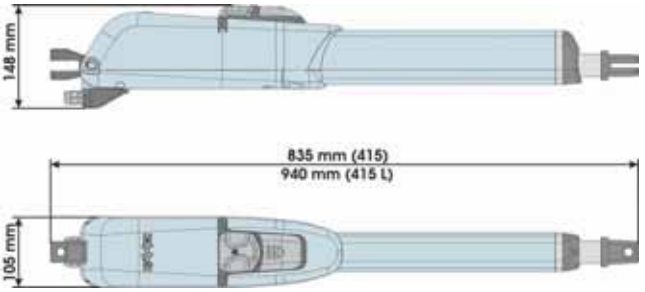



Release device-key protected and easy to operate

24V SAFEzone system:
415 24V + E024S or E124

24V GREENtech system:
415 24V + E124

DIMENSIONS AND TECHNICAL SPECIFICATIONS

Model	415 24V	415 L 24V
Power supply voltage	220-240V~ 50/60 Hz	220-240V~ 50/60 Hz
Motor	With brushes 24V ⎓	With brushes 24V ⎓
Max. power	70 W	70 W
Max expressed force	2800 N	2800 N
Rod max speed	16 mm/s	16 mm/s
Rod travel	300 mm	400 mm
Max. leaf opening angle	110°	110°
Operating ambient temperature	-20°C ÷ +55°C	-20°C ÷ +55°C
Protection class	IP54	IP54
Weight	7.8 Kg	8 Kg
Use frequency	Continuous use	Continuous use
Max. leaf width	2 m	3 m
Mounting brackets	Rear attachment to be welded/screwed - front attachment to be welded	
Dimensions (LxDxH)	835 x 105 x 148 mm	940 x 105 x 148 mm
Electronic equipment	Not included	Not included

FAAC S.p.A. via Benini, 1
40069 Zola Predosa - Bologna (Italia)
tel. +39 051 61724 • fax +39 051 758518
www.faacgroup.com